

**CO2 DETECOTRS**  
**MODEL AX60+**

**PERFECTION**



**Analog CO2 Protection**  
**Provided by Perfection**

Perfection Equipment, Inc.  
Perfecta Stainless Division




**How the Analog60+ works**

The Ax60+ is a wall-mountable gas safety device for monitoring oxygen and carbon dioxide. The sensors are interchangeable and can be fully integrated as part of a multi-point, multi-gas detection and alarm system.

The CO2 sensor is set by default to trigger a low-level alarm at 1.5% CO2, an evacuation alarm at 3% CO2 and a time-weighted average alarm of 0.5% CO2 measured over eight hours. The Analog 60+ is fitted with audio and visual alarms. When excess levels of carbon dioxide are detected the alarm is triggered. You should then ventilate the room and wait outside until the unit returns to safe mode.

By installing an Analog 60+ you are protecting employees, non-employees and yourself from a potentially dangerous situation. Installation and calibration should only be performed by authorized service and installation professionals.

SPECIFICATIONS	
DIMENSIONS	Display Unit : 7" x 4.5" x 3" (W x H x D) Sensor : 3" x 7" x 2" (W x H x D)
ELECTRICAL	115V - 50/60 HZ SINGLE PHASE 15.0 AMP OUTLET WITHIN 6' OF DISPLAY UNIT.
INSTALLATION	Display unit is mounted on exterior of walk-in cooler entrance at eye level. Power adapter with 6-1/2' leads supplies power to unit. Sensor is connected to display unit by 25' Cat5e cable included.

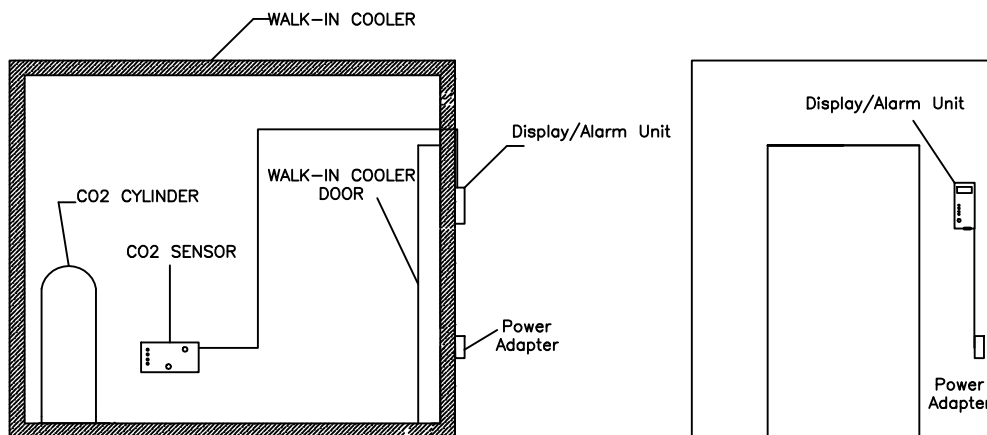

**PERFECTION Equipment, Inc.**

4259 Lee Avenue, Gurnee, Illinois 60031, Phone: 847-244-7200, Fax: 847-244-7205, Toll Free: 800-356-6301  
Website: [www.perfectequip.com](http://www.perfectequip.com) Mail to: [sales@perfectequip.com](mailto:sales@perfectequip.com)

